



VAPPRO 999 ANTI-SEIZE COMPOUND

NATO STOCK NUMBER:
8030-32-076-1179

DESCRIPTION

VAPPRO 999 is a metallic silver high temperature grease made from a high VI olefinic copolymer and a finely divided thickener. This grease is fortified with V.C.I. additives that provide it with excellent lubricating properties, stability and anti-wear capabilities.

PERFORMANCE CHARACTERISTICS

VAPPRO 999 is a non-gumming, non-petroleum base grease. It has no dropping point, so it will not run out of threads when heated. It sticks to the metal threads and lets joints in pipe or nuts on bolts or studs make up with less torque.

VAPPRO 999 is also a high-temperature anti-friction bearing lubricant that functions in high-speed use to 450 degree F. From 600 degree F through 2100 it functions as a dry-film lubricant for heavy load and slow speed use - such as in slides or slow-revolution equipment, with the molybdenum actually plating out to prevent metal-to-metal contact and surface scuffing. It also provides reliable lubrication in boundary conditions.

VAPPRO 999 when operated at high temperatures for a prolonged time interval will need to be reapplied more frequently than when operated at lower temperatures.


COMPOSITION

VAPPRO 999 is an olefinic copolymer and a finely divided thickener, homogenized with V.C.I. additive fortifiers, molybdenum disulfide (in sub-micron particle size), graphite and aluminum.

APPLICATIONS

- Gaskets -Threaded Fittings
- Bushings -Compressors
- Rollers -Electric Motors
- Hoists - Regulators
- Wenches -Valve Steams
- Bearings - Chains
- Pumps - Drives
- Gears -Turbines
- Hand/Motor Operated Valves -Furnaces
- Flanges and "O" rings -Conveyors
- Control chests and head
- Man/hand hole inspection doors
- Low-speed transmission boxes
- Burner assemblies and similar applications



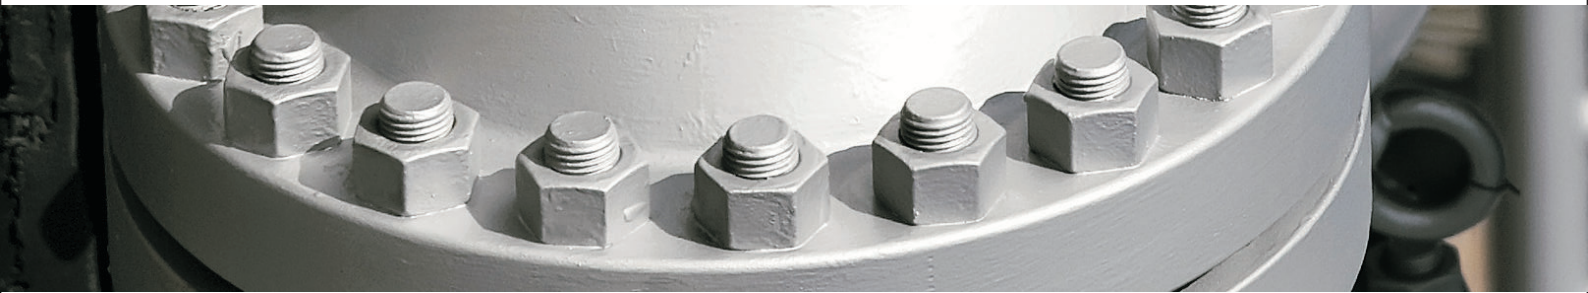

SPECIFICATIONS

ASTM Drop Point
Non-melt

Water Resistance
Excellent

Viscosity base SUS @210 Degree F
4800

Color
Metallic silver

Water Soluble
Water proof

Flash Point
Non-flammable

Operating Temperature Range
-30 to 2100 Degree F

Drop Point
No dropping point

Metallic Content
No lead or copper

AVAILABLE PACKAGING

18kg pail

For more information about the product or any technical support, please contact us or our authorized distributor:



HEADQUARTERS, SINGAPORE

Magna International Pte Ltd
10H, Enterprise Road,
Singapore 629834.
Tel (65) 6788-1228
Fax (65) 6785-1497
Email info@magnachem.com.sg
Website <http://www.magnachem.com.sg>

NORTH AMERICA

1450 Government Road West
Kirkland Lake, Ontario P2N 2E9
Canada
Tel 1.416 479 9151
Fax 1.888 317 1993
Email magna@vapro.com
Website: <http://www.vapro.com>



Magna and Vapro are registered trademarks of Magna International Pte Ltd.

Copyright 2007. The details of our products are given completely free of undertaking. Since their application lies outside our control, we cannot accept any liability for the results. User shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.